

OUR BUSINESS CLIENTS



TATA POWER

adani
Power

JINDAL
STEEL & POWER

GOLDI
SOLAR

WAAREE
One with the Sun

एनटीपीसी
NTPC

KEI
Wires & Cables

And many more...



Corporate Office

11/a Closed Street, Bhaktinagar Station Plot, Op: Anil Traders Rajkot - 360002

Factory

Balaji Industrial -5 Near Star Casting And Opp. Able Technocast,
Manda Dungar, Aji Dam Rajkot - 360003

Contact No


9374301010 • 7623968140

Email Id

Rsting923@gmail.com

Website

Www.stingrayearthing.com

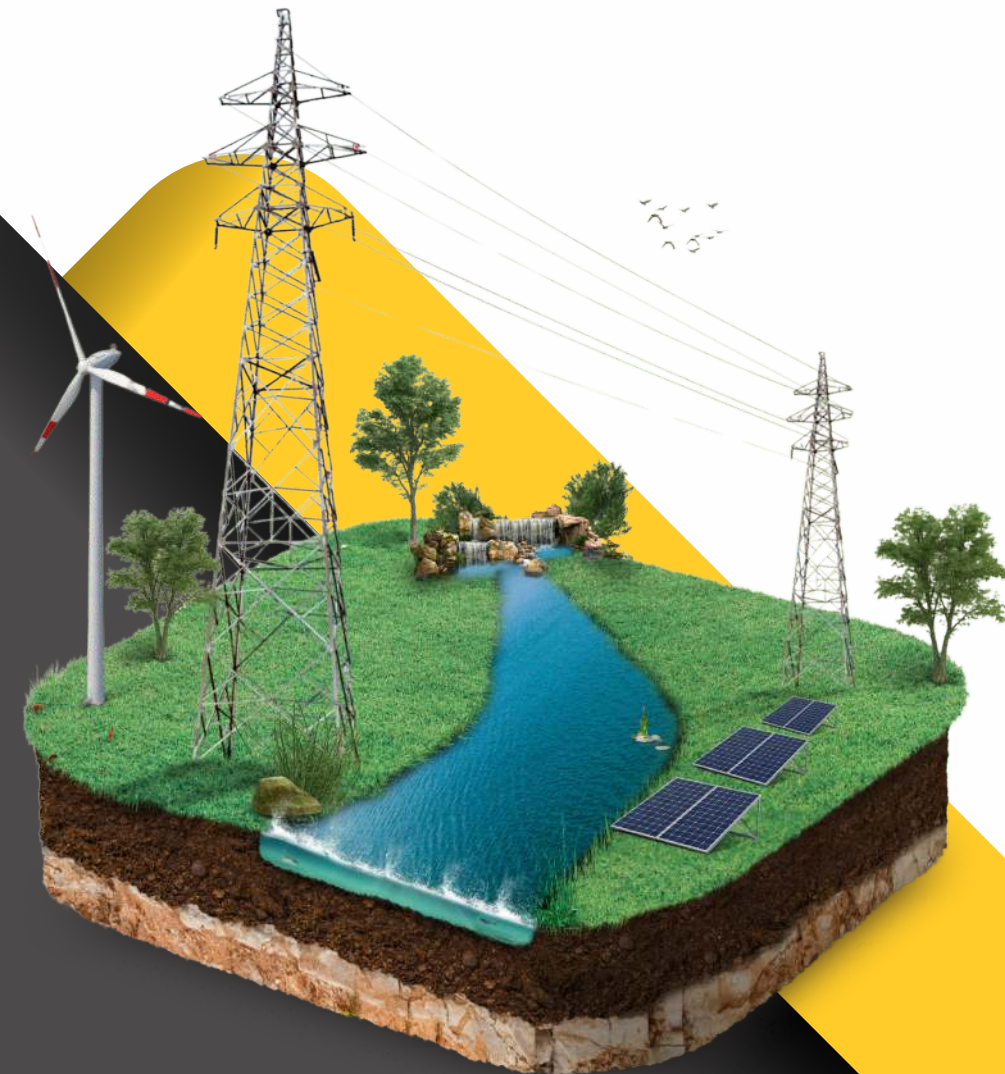

WE DEAL ECONOMIC ENGINEERING



GI EARTHING ELECTRODE

- Corrosion protection by hot dip galvanization.
- Designed for fast fault current dissipation.
- Low maintenance and low space requirement.
- Easy and Fast installation.
- Most suitable for electrode condition with oh value between 0 to 5 ohm.
- Moisture booster bag provided for low earth resistance.
- No need to pour water.

PRODUCT	MODEL	LENGTH (METER)	QUTER PIPE DIA.(MM)	TERMINAL (MM)
GI Earthing Electrode	SEGP32	01-02-03	32	30X5
	SEGP40	01-02-03	40	30X5
	SEGP50	01-02-03	50	30X5
	SEGP58	01-02-03	58	30X5
	SEGP80	01-02-03	80	80X5

COPPER EARTHING ELECTRODE

- 50/100/250 microns coating on iron electrode.
- Continues Electroplating over Electrode result copper.
- Conductivity at outer section.
- Variation in size availability.
- Less space require at time of installation.
- High Conduction on outer Section.
- No Maintenance.

PRODUCT	MODEL	LENGTH (METER)	QUTER PIPE DIA.(MM)	CU BONDED (MICRON)
CU Bonded Earthing Electrode	SECPB32	01-02-03	32	50-250
	SECPB40	01-02-03	40	50-250
	SECPB50	01-02-03	50	50-250
	SECPB58	01-02-03	58	50-250
	SECPB80	01-02-03	80	50-250

COPPER EARTHING ELECTRODE

- Based on globally accepted technology.
- Stable performance due to uniformed coating.
- Various models according to customer requirements .
- Suitable for all types of soil.
- Long life and easy installation.
- Superior resistance to oxidation.
- High tensile strength.
- Effective performance.
- Good electrical conduction.

PRODUCT	MODEL	LENGTH (METER)	EARTHING ROD DIA.(MM)	CU BONDED (MICRON)
Cu Bonded Solid Rod	SECBR14	01-02-03	14	50-250
	SECBR17	01-02-03	17	50-250
	SECBR25	01-02-03	25	50-250

BACK FILLING COMPOUND

- Back Fill Earth Enhancement Compound tested from NABL Accredited lab.
- Due to conductive material improve the soil resistivity.
- Its also increase the conductivity of Earth Electrode.
- Maintenance Free.
- Long Life.
- Automatically rechargeable.
- No Need to pouring water time to time.



BFC Bags Size : 25kg | 15 kg | 10 Kg




COPPER EARTHING STRIPS

Copper Strips and DPC/DCC strips are used in the Electrical Industries, Electroplating plants, Motors, Generators, Transformers, and Household Electrical Appliances



GI EARTHING STRIPS

GI Earthing Strips are a conventional method for providing earthing to the various area like industrial, residential, commercial, etc.

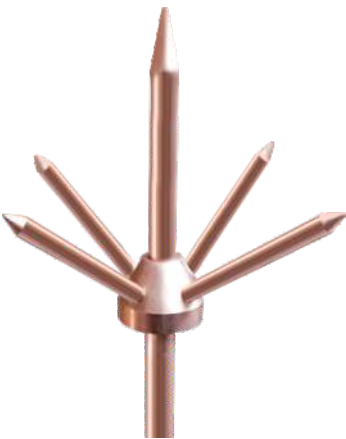

CONVENTIONAL SPIKE TYPE LIGHTNING ARRESTER

We are also one of the reliable manufacturers, supplier of conventional Lighting Arrester. The arresters that we offered are developed by a team of diligent experts, following industry norms and guidelines. These lightning arresters are highly recommended in the market for its excellent weather lighting tracker system which provide insulation from natural lighting discharge. Furthermore, our clients can avail these arresters from us in varied shapes and size as per their requirement.



EARTH PIT COVER

- Assuring Long Use Life.
- Green Top Cap Matches the Environment.
- No Any Maintenance Require after Installation.
- 3.ton Loading Capacity

Give high level of safety to Earthing electrode. Save completely civil work cost and Possible to Relocated.